Halsey Taylor®
Satisfying Thirsts Since 1912

Freeze-Resistant Three-Station Marblyte™ Barrier-Free Fountain

MODEL 7130 FR

This fountain is certified to **NSF/ANSI 61.**

GENERAL
Three-Station face-mounted fountain made of White Granite Marblyte™ solid-surface non-porous polymer. Contour-formed basin with softly rounded corners and edges reduces splatter, insures proper drainage and prevents standing waste water. Designed to be easily accessible on either side to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. Model meets state and federal requirements as defined by the Americans with Disabilities Act.

FREEZE-RESISTANT VALVE SYSTEM
Freeze-resistant system features box that installs behind non-freezing wall for housing water connection from the stop to the strainer.

BUBBLERS
Vandal-resistant bubblers are one-piece, chrome plated, and are secured to fountain with anti-rotation mounting system. Unit has integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

PUSHBUTTON ACTUATION MECHANISM
Self-closing, vandal-resistant pushbuttons do not require grasping or twisting.

AUTOMATIC STREAM HEIGHT REGULATOR
Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and liming. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

BOTTOM COVER
Fountain is equipped with a bottom cover. Cover is secured to the fountain with vandal-resistant fasteners.

INLET STRAINER
Two easily cleaned in-line strainers screen traps particles of 140 microns or larger before they enter the waterway.

WATER INLET
3/8" O.D. Tubing

DRAIN OUTLET
1-1/2" tube outlet for 1-1/2" slip joint connection.

SUGGESTED SPECIFICATIONS
Fountain shall include pushbuttons on the front, contour-formed basins to eliminate splashing and standing water, and shall have rounded corners and edges. Projectors shall be chrome-plated vandal-resistant type with integral hood guard and anti-squirt feature. Fountain shall comply with ANSI 117:1 and ADA for visual and motion disabilities. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act.

Note: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.

Standard Finish is White Granite Marblyte™

Optional Accessories (extra cost)

☐ Standard Double Bubblers™

Each 7130 FR consists of 2 carton of the following:

Fountain and Misc. Parts
Freeze-Resistant Valve System

Service stop not included.

Shipping weight: 152 lbs.

JOB NAME: _____

_____

_____

ENGINEER/CONTRACTOR NAME:

_____

APPROVAL: _____

DATE: _____

halseytaylor.com
HALSEY TAYLOR, 2222 CAMDEN COURT, OAK BROOK, ILLINOIS 60523

7130 FR

Freeze-Resistant Three Station Marblyte™ Barrier-Free Drinking Fountain

(CONTINUED)

MOUNTING INSTRUCTIONS
Refer to diagrams for rough-in of plumbing. Bolt fountain securely to wall per installation instructions. Water supply and waste line are to be assembled as required. The final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.)

OPERATING PRESSURES:
Supply water - 105 psi maximum

Important: For required wall support locations see installation instructions provided with fountain.

NOTE: A service supply stop (not included) must be installed at the fountain inlet line.

TOP VIEW

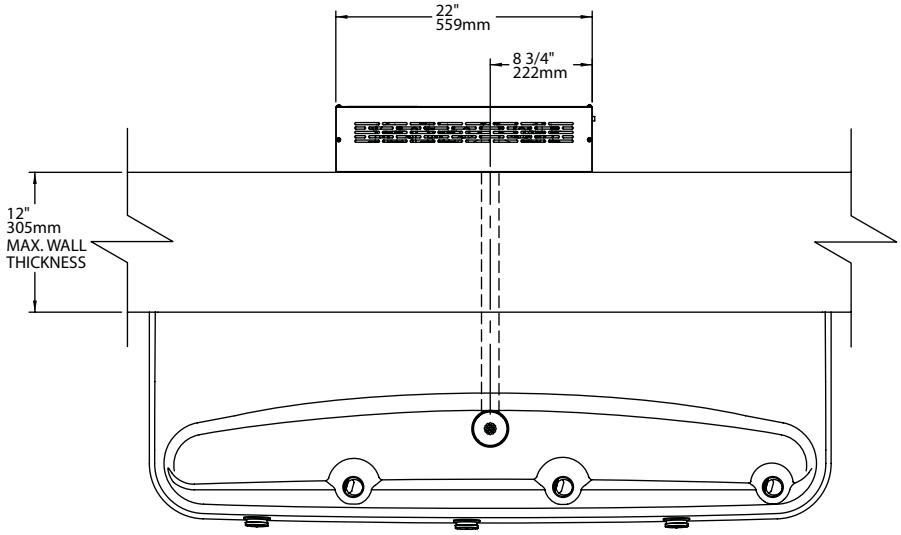

WALL LAYOUT

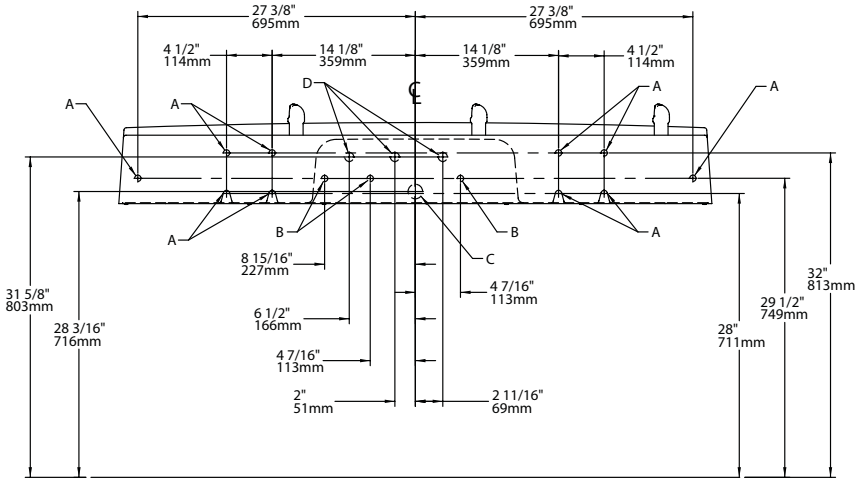

SIDE VIEW

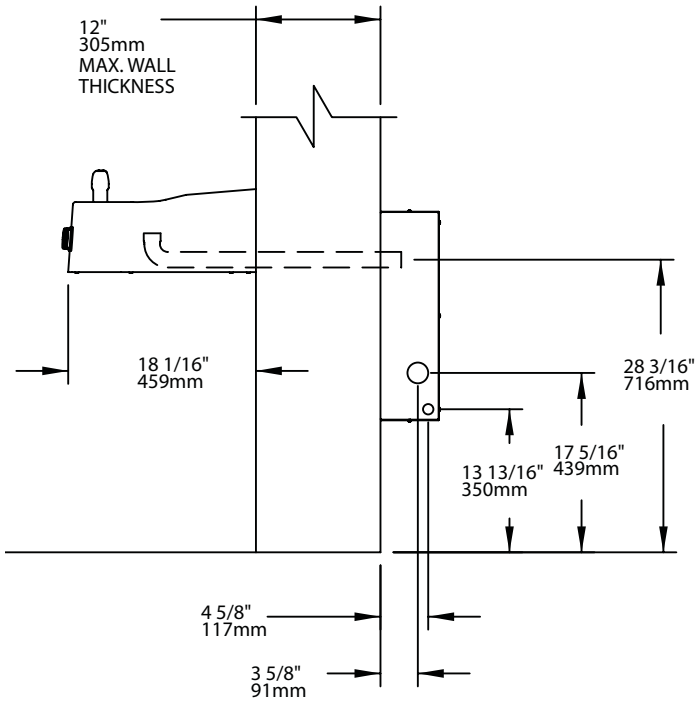

LEGEND

A = HOLE LOCATIONS FOR SECURING FOUNTAIN TO WALL

B = 7/8" DIA. (22mm) HOLE FOR OPERATING CABLE

C = 1-3/4" (44mm) HOLE FOR WASTE LINE

D = 7/8" DIA. (22mm) HOLE FOR WATER SUPPLY TUBE



DETAIL #1

Halsey Taylor®

Printed in the U.S.A.